



Ratings Range

		KD40U 60 Hz	KD44 50 Hz
Standby:	kW	32-40	35
	kVA	40-50	44
Prime:	kW	29-36	32
	kVA	36-45	40

Standard Features

- Kohler Co. provides one-source responsibility for the generating system and accessories.
- The generator set and its components are prototype-tested, factory-built, and production-tested.
- A one-year limited warranty covers all systems and components.
- John Deere engine with 12-volt battery charging alternator.
- Single-bearing alternator with insulation class H.
- Unit-mounted radiator with 50°C (122°F) ambient air capability.
- Skid and vibration isolators.
- Subbase fuel tank, 100 L (26 gal.).
- Dry type air filter.
- Main line circuit breaker.
- Microprocessor controller.
- Battery, battery rack, and cables.
- Industrial 9 dB(A) reduction exhaust silencer (loose).
- Operation and installation literature.

Generator Set Ratings

Alternator	Voltage	Ph	Hz	Standby Rating		Prime Rating	
				kW/kVA	Amps	kW/kVA	Amps
LSA432S15 or ECO32-3S	120/208	3	60	37/46	128	33/42	115
	127/220	3	60	40/50	131	36/45	118
	115/230	3	60	32/40	100	29/36	91
	120/240	3	60	40/50	120	36/45	108
	220/380	3	60	40/50	76	36/45	68
	254/440	3	60	40/50	66	36/45	59
	277/480	3	60	40/50	60	36/45	54
	115/200	3	50	35/44	127	32/40	116
	110/220	3	50	35/44	115	32/40	105
	127/220	3	50	28/35	92	25/32	82
115/230	3	50	35/44	110	32/40	101	
120/240	3	50	35/44	106	32/40	96	
220/380	3	50	35/44	67	32/40	61	
230/400	3	50	35/44	64	32/40	58	
240/415	3	50	35/44	61	32/40	56	



With Available Enclosure Accessory

RATINGS: All three-phase units are rated at 0.8 power factor. See TIB-109 for generator set derate tables. Obtain the technical information bulletin (TIB-101) on ratings guidelines for the complete ratings definitions.

PRP: Prime power is available for an unlimited number of annual operating hours in variable load applications in accordance with ISO-8528/1.

A 10% overload capability is available for a period of 1 hour within a 12-hour period of operating in accordance with ISO-3046/1.

ESP: The emergency standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO-8528/1. Overload is not allowed.

The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

Alternator Specifications

- NEMA-MG21, UTE NF C51.111, VDE 0530, BS 4999, CSA standards compliance for temperature rise and motor starting.
- Sustained short-circuit current greater than 300% of the rated current for up to 10 seconds.
- Self-ventilated and dripproof construction.
- Vacuum-impregnated windings with fungus-resistant epoxy varnish for dependability and long life.
- Superior voltage waveform from a two-thirds pitch stator and skewed rotor.

Specifications LSA432S15	60 Hz	50 Hz
Ratings voltage	480 V	400 V
Standby rating @ 27°C, kVA	59.0	47.0
Prime rating @ 40°C, kVA	50.0	40.0
Efficiency @ full load, %	89.0	88.5
Air flow, m ³ /min. (cfm)	19.2 (678)	16.2 (572)
Direct axis subtransient reactance (X ^{"d}), %	5.8	5.6

Specifications ECO32-3S	60 Hz	50 Hz
Ratings voltage	480 V	400 V
Standby rating @ 27°C, kVA	52.8	44
Prime rating @ 40°C, kVA	48	40
Efficiency @ full load, %	88.8	87.4
Air flow, m ³ /min. (cfm)	14.5 (512)	11.8 (417)
Direct axis subtransient reactance (X ^{"d}), %	10	

Specifications LSA432S15/ECO32-3S	Alternator
Manufacturer	Leroy Somer/Mecc Alte
Type	4-Pole, Rotating-Field
Exciter type	Shunt/Brushless
Leads: quantity, type	12, Reconnectable
Voltage regulator	Solid State
Insulation:	NEMA MG1
Material	Class H
Bearing: quantity, type	1, Sealed
Coupling	Direct
Voltage regulation, no-load to full-load	±1%

Application Data

Engine

Engine Specifications	60 Hz	50 Hz
Manufacturer	John Deere	
Engine model	3029TF120	
Engine type	4-Cycle, Turbocharged	
Cylinder arrangement	3 Inline	
Displacement, L (cu. in.)	2.9 (179)	
Bore and stroke, mm (in.)	106 x 110 (4.17 x 4.33)	
Compression ratio	17.8:1	
Piston speed, m/min. (ft./min.)	396 (1302)	330 (1083)
Rated rpm	1800	1500
Max. power at rated rpm, kWm (BHP)	44.5 (60)	40 (54)
Valve material:		
Intake	Chromium-Silicon Steel	
Exhaust	Stainless Steel	
Governor type	Mechanical	
Frequency regulation, no-load to full-load	ISO 5%	
Frequency regulation, steady state	±2.5%	
Air cleaner type, all models	Dry	

Exhaust

Exhaust System	60 Hz	50 Hz
Exhaust manifold type	Dry	
Exhaust flow at rated kW, m ³ /min. (cfm)	8.3 (292)	6.3 (224)
Exhaust temperature at rated kW, dry exhaust, °C (°F)	517 (963)	510 (950)
Maximum allowable back pressure, kPa (in. Hg)	6.2 (1.83)	
Exhaust outlet size at engine hookup, mm (in.)	63.5 (2.5)	

Engine Electrical

Engine Electrical System	60 Hz	50 Hz
Battery charging alternator:		
Ground (negative/positive)	Negative	
Volts (DC)	12	
Starter motor rated voltage (DC)	12	
Battery, recommended cold cranking amps (CCA):		
Quantity, CCA rating each	One, 680	
Battery voltage (DC)	12	

Fuel

Fuel System	60 Hz	50 Hz
Max. fuel flow, Lph (gph)	108 (28.5)	111 (29.3)
Fuel prime pump	Manual	
Recommended fuel	#2 Diesel	
Fuel tank capacity, L (gal.)	100 (26)	

Lubrication

Lubricating System	60 Hz	50 Hz
Type	Full Pressure	
Oil pan capacity, L (qt.)	5.3 (5.6)	
Oil pan capacity with filter, L (qt.)	6.0 (6.3)	

Cooling

Radiator System	60 Hz	50 Hz
Ambient temperature, °C (°F)	50 (122)	
Radiator system capacity, including engine, L (gal.)	16.1 (4.3)	
Heat rejected to cooling water at rated kW, dry exhaust, kW (Btu/min.)	28 (1592)	
Water pump type	Centrifugal	
Fan, kWm (HP)	2 (2.7)	1.5 (2.0)
Max. restriction of cooling air, intake and discharge side of radiator, kPa (in. H ₂ O)	0.2 (0.8)	

Application Data

Operation Requirements

Air Requirements	60 Hz	50 Hz
Radiator-cooled cooling air, m ³ /min. (scfm) *	140 (4959)	112 (3942)
Combustion air, m ³ /min. (cfm)	2.9 (103)	2.3 (80)

* Air density = 1.20 kg/m³ (0.075 lbm/ft³)

Fuel Consumption	60 Hz	50 Hz
Diesel, Lph (gph) at % load	Standby Rating	
110% (of the standby rating)	15.0 (3.9)	13.6 (3.6)
Diesel, Lph (gph) at % load	Prime Rating	
100% (of the prime rating)	13.1 (3.5)	11.2 (3.0)
75% (of the prime rating)	10.1 (2.7)	8.4 (2.2)
50% (of the prime rating)	6.9 (1.8)	6.0 (1.6)

Controllers



Decision-Maker™ 1000

Automation

- Test LEDs
- Voltage and speed stabilization

Engine Parameters

- Engine speed indication (with LCD message)
- Battery voltage indication (with LCD message)
- Elapsed hour meter (with LCD message)
- Fuel solenoid control
- Starter control

Measurements

- Frequency, Hz (with LCD message)

Operation and/or Safety Lights

- Oil pressure fault
- Water temperature fault
- Fail to start fault
- Overspeed fault (≥60 kVA)
- Set ready for load
- Charging alternator fault
- General alarm
- General fault
- Panel lamp
- Emergency stop fault

Safety Devices

- Overspeed fault
- Automatic standby

Miscellaneous

- Fault reset
- Three-phase with or without neutral, two-phase, or single-phase use



Decision-Maker™ 4000

Standard Features

- Large LCD display panel
- Unique control wheel for system access
- User buttons for start, stop, menu, and escape
- Emergency stop button
- On/off key switch
- Panel-mounted battery fuse
- Panel-mounted USB ports for PC access and software upgrades
- Password-protected access to control parameters
- Upgradeable software for future enhancements
- Easy upgrade from Decision-Maker™ 1000

LCD Panel Features

- 600 x 800 resolution
- Multiple lines of text or graphic display
- Icons for quick identification of system status
- Five languages: English, French, German, Portuguese, and Spanish

Communication Features

- Engine communication via CANbus
- Modbus communication via RS-485 or ethernet
- PC and flash drive connections via USB

Functions

- View and adjust system operation parameters
- View system faults

Viewable/Selectable Parameters (may require optional module)

- Voltage: phase-to-neutral, total voltage
- Current
- Frequency
- Power (active/reactive/apparent)
- Power factor
- Engine speed
- Oil pressure
- Coolant temperature
- Battery voltage
- Fuel level (%)
- Time delays

Viewable Faults (over 60 individual faults are monitored) including:

- Alternator protection (if equipped)
- Circuit breaker and ground fault protection
- Communication and engine ECM monitoring
- Cooling air monitoring
- Electrical charging system
- Engine cooling system
- Engine lube system
- Fuel system
- Generator set status

Available Accessories

Enclosed Unit

- Sound Enclosure M127, 60 Hz, 67 dB(A) @ 7 m (23 ft.), Standby (with enclosed critical silencer)
- Sound Enclosure M127, 50 Hz, 63 dB(A) @ 7 m (23 ft.), Standby (with enclosed critical silencer)

Open Unit

- Exhaust Silencer, Critical 40 dB(A) Reduction
- Exhaust Silencer, Residential 29 dB(A) Reduction
- Extension, 40 cm (16 in.)
- Flexible Exhaust Connector
- Protection Mesh

Cooling System

- Block Heater
[recommended for ambient temperatures below 0°C (32°F)]
- Radiator Core Guard

Decision-Maker™ 1000 Controller

- Alarm Horn
- Analog Indicator
- Differential Protection with Time and Sensitivity Adjustment
- Differential Triggering Fault
- External ATS Position
- External Starting Order
- Line Voltages, Volts Indicator
- Overload or Short-Circuit Fault
- Permanent Insulation Controller
- Phase Currents, Amps Indicator
- Plug Preheating
- Plug Preheating Control
- Remote Start Capability
- Single Voltages, Volts Indicator
- Utility Sensing, 3-Phase
- Water Preheating Control

Decision-Maker™ 4000 Controller

- Alternator Protection
- Audible Alarm Module
- Five Expandable Modules with Four Inputs/Six Outputs Each
- Network Modules (RTC and GSM modems and ethernet router)
- NFPA-110 Module
- Remote Annunciator
- Voltage/Speed Adjustment Module
- WinTelys Software

Fuel System

- Subbase Fuel Tank with Secondary Containment Basin
- Subbase Fuel Tank Leak Alarm
- Water Separator Fuel Filter

Electrical System

- Battery Charger, Equalize/Float Type
- Battery Isolator Switch

Engine and Alternator


- Air Cleaner, Heavy Duty (with air restriction indicator)
- Electronic Isochronous Governor
- Lube Oil Drain Pump

Miscellaneous Accessories

- _____
- _____
- _____
- _____


Dimensions and Weights

Open Model

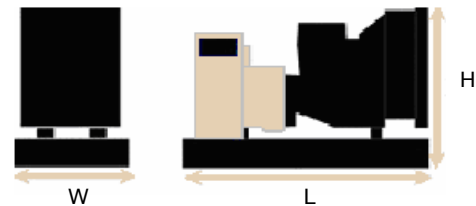

Overall Size, L x W x H, mm (in.): 1700 x 896 x 1221 (67 x 35 x 48)
 Weight, wet, kg (lb.):
 60 Hz 850 (1873)
 50 Hz 930 (2050)

With Available Enclosure Accessory

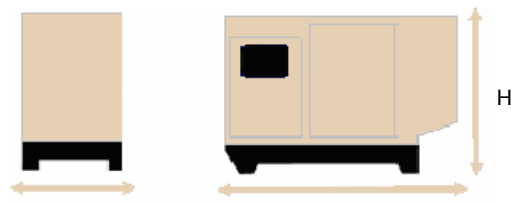

Overall Size, L x W x H, mm (in.): 2080 x 960 x 1415 (82 x 38 x 56)
 Weight, wet, kg (lb.):
 60 Hz 1080 (2380)
 50 Hz 1150 (2535)

NOTE: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

DISTRIBUTED BY:



83-89 Westgate Drive
 Altona North, Victoria
 Australia, 3025

www.eastcoastgenerators.com.au